



ONVIF 2.4 POE



**Motorized Lens
Auto Focus**


H.265



4.0MP Full HD Network Dome Camera

Model: VI4013AZ-IPC-POE



- ◆ 1/3" 4.0MP HDR (high dynamic range) & Low Light Sensitivity CMOS
- ◆ H.265 / H.264 & MJPEG dual-stream encoding
- ◆ 15fps@4.0MP; 30fps@3.0MP;30fps@1080P
- ◆ Super DWDR, Low Lux
- ◆ **2.8-12mm Motorized lens**
- ◆ Max. IR LEDs Length 25M
- ◆ Waterproof Resistance IP66



Technical Specifications

Model	VI4013AZ-IPC-POE
Camera	
Image Sensor	1/3" 4.0MP HDR(high dynamic range) & Low Light Sensitivity CMOS
Effective Pixels	2688 x 1520
Min. Illumination	0.05Lux/F1.2 (Color), 0.01Lux/F1.2(B/W), 0Lux (IR ON)
S/N Ratio	≥50db(AGC OFF)
Camera Features	
IR LEDs	3pcs IR Array LED
Max. IR LEDs Length	25M
Day/Night	Auto(ICR) / Color / B/W
Lens	
Focal Length	Motor-drive Lens 2.8~12mm
Video	
Compression	H.265 / H.264 Baseline / Main Profile / MJPEG
Dual Stream	Support
Main Stream	2688x1520(1~15fps), 1920x1080(1~25/30fps), 1280x720 (1~25/30fps)
Sub Stream	720x576(1~25/30fps), 640x480(1~25/30fps), 640x352(1~25/30fps), 320x240(1~25/30fps)
Bit Rate	32KB ~16Mbps, support VBR, CBR
Network	
Recording mode	Manual, Auto (always, timing, alarm, motion)
Protocol	TCP/IP, UDP, RTP, RTSP, RTCP,HTTP, DNS, DDNS,
ONVIF	ONVIF Ver. 2.4
IE	Support IE6.0 above (built-in web server). Support Max. 10 users in the same time
General	
Power Supply	DC12V 500mA / POE (802.3at) / POE (802.3af)
Working Environment	Temp. -10°C to 50°C RH 85% Max
Protection Level	IP66
Dimensions	Φ147x121.7mm
Weight	655g

Dimensions (mm) :

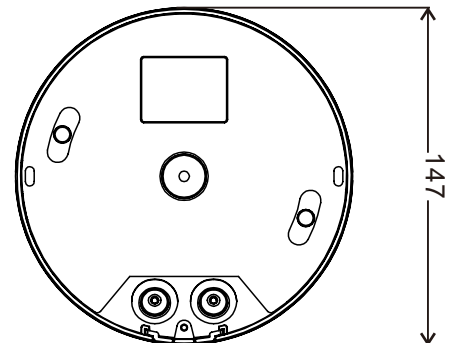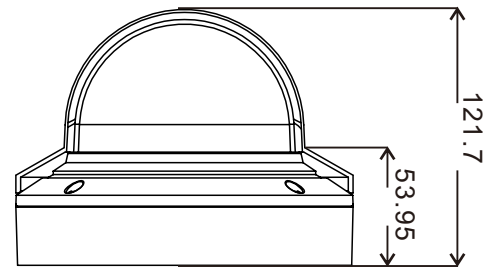



Compatible ONVIF 2.4

Super DWDR function



Provide SDK for secondary development to fit in with other system



More NVR Partners



More Platform Software Partners



More P2P Cloud Server

