

180° 5.0MP HD Fisheye IP Camera

H.265



FU503A-POE

No dark corner around




Picture from ISC WEST 2016 Show

Features

- > 1/3" 5.0MP HDR (High Dynamic Range) & High Sensitivity CMOS
- > H.265 / H.264 & MJPEG dual-stream encoding
- > 15fps@5.0MP, 30fps@3.0MP, 30fps@1080P
- > 1.7mm 5.0 Mega Pixel fisheye lens
- > DWDR, 3D-DNR, AntiFogging, Image Stabilizer
- > IR range up to 60ft

Dimension

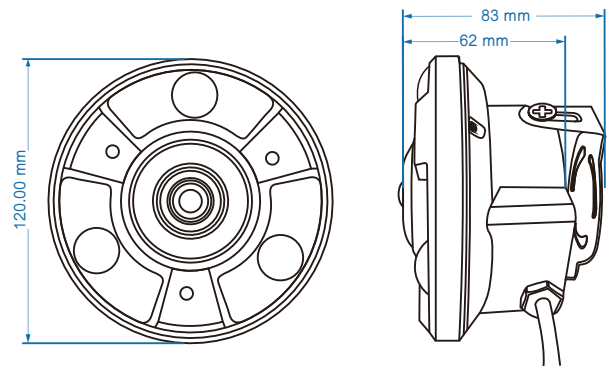

Specification

Model	FU503A-IPC-POE
Sensor	
Image Sensor	1/3" 5.0MP HDR (High Dynamic Range) & High Sensitivity CMOS
Min. Illumination	0.6Lux/F1.2 (Color), 0.08Lux/F1.2(B/W), 0Lux (IR ON)
S/N Ratio	≥50db(AGC OFF)
WDR Range	DWDR, >80db
Video	
Compression	H.265 (Main Profile), H.264 (Baseline/Main Profile/High Profile), MJPEG
Main Stream	2592x1944@10/15fps, 2048x1536@25/30fps, 1920x1080@25/30fps
Sub Stream	704x576@25/30fps, 640x480@25/30fps, 640x352@25/30fps, 320x240@25/30fps
Bit Rate	32KB ~ 16Mbps, support VBR, CBR
Network	
Recording mode	Manual, Auto (always, timing, alarm, motion)
Protocol	TCP/IP, UDP, RTP, RTSP, RTCP,HTTP, DNS, DDNS DHCP, FTP, NTP, PPPOE, SMTP, UPNP
ONVIF	ONVIF Ver. 2.4
IE	Support IE6.0 above (built-in web server). Support Max. 10 users in the same time
Camera Features	
Lens	1.7mm 5.0MP fisheye lens
IR LEDs	3pcs IR Array LED
Max. IR Distance	30-60 ft
Day/Night	Auto (ICR) / Color / B/W
General	
Power Supply	DC12V 600mA
Working Environment	Temp. -10°C to 50°C RH 85% Max
Dimensions	120mm(D) x 83mm(H)
Weight	340g



Compatible ONVIF 2.4

Super DWDR function



Provide SDK for secondary development to fit in with other system



More NVR Partners



More Platform Software Partners



The Open Platform Company

More P2P Cloud Server

